

finesse.
global enterprise

Visit our showroom:

📍 5980 Clark Center
Av. Sarasota Florida
34238

Opening Hours

🕒 Monday - Friday: 9am | 4pm
🕒 Saturday: By Appointment
🕒 Sunday: Closed

Get in Touch

✉ contact@finesseus.com
📞 941.390.5745
📷 @us_finesse

finesse.
global enterprise




WIDELY USED IN INDOOR AND OUTDOOR BUILDINGS


STEEL DOOR

Product Details

Customer Orientation Quality First Service Oriented

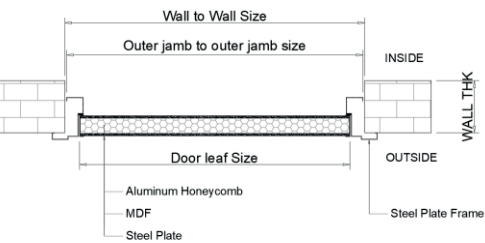

aluminum honeycomb filling

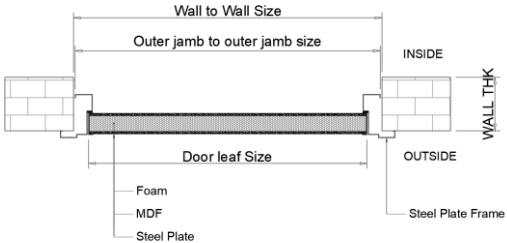

HDF foam board

Color card

Customer Orientation Quality First Service Oriented





PR-S01



PR-S02



PR-S03



PR-S04



PR-S05



PR-S06



PR-S07



PR-S08



PR-S09



PR-S10



PR-S11



PR-S12



PR-S13



PR-S14



PR-S15



PR-S19



PR-S16



PR-S17



PR-S18



PR-S20




PR-S21



PR-S22



PR-S23

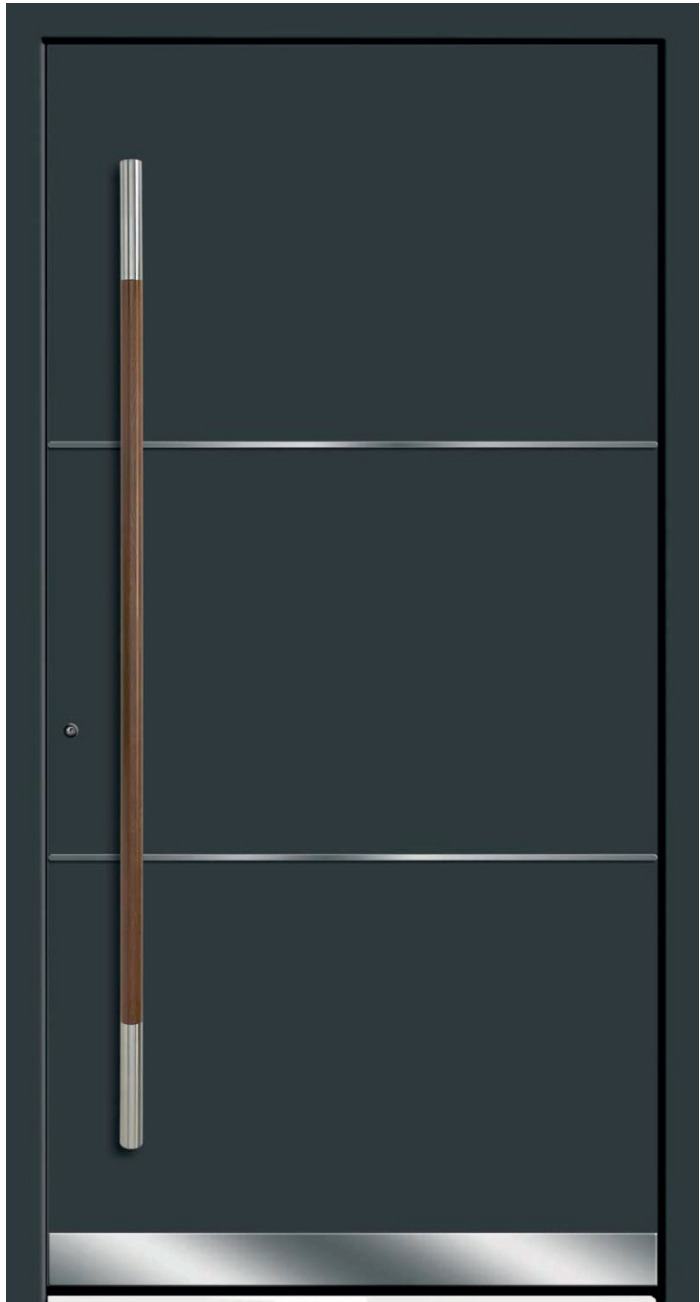

PR-S24



PR-S25



PR-S26



PR-S27



PR-S28



PR-S29



PR-S30



PR-S31



PR-S35



PR-S36



PR-S32



PR-S33



PR-S34



PR-S37



PR-S38



PR-S39



PR-S40



PR-S41



PR-S44



PR-S45



PR-S42



PR-S43




PR-S46



PR-S47

STEEL FIRE RATED DOOR

Material

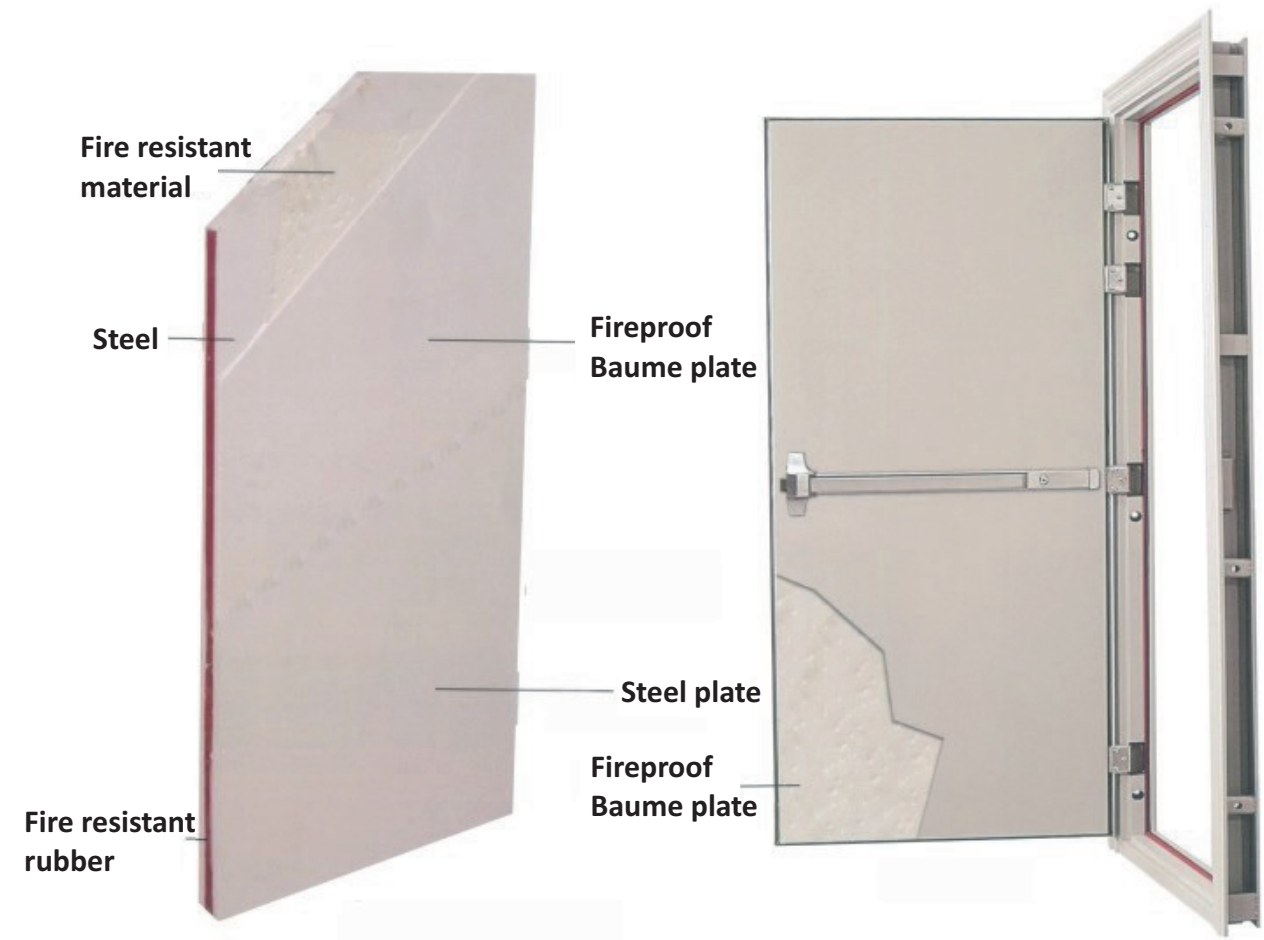

Product name	Steel Fire rated door
Glass window	With/without glass window
Color	Grey white or customized color
Surface finishing	Powder coating/Heat transfer
Material	Galvanized steel
Thickness of door panel material	0.8mm
Thickness of door frame Material	1.2mm
Thickness of door panel	55mm(1.5hours), 45mm(1hour, 45mm(0.5hour)
Thickness of door frame	120mm or depends on customer
Fire rated time	Left/Right, Inward/outward
Door accessories	Fire lock(panic Bar), door handle, hinge, door closer etc.
Package	Protective plastic film + Paper carton + Packing belt

Model No	PR-SFR01
Name of Product	Steel fire rated door
Door Frame Material	1.2mm galvanized steel sheet
Ref. Dimension	2100mm*2300 or customized
Depth of Door Frame	105mm
Thickness of Door Leaf	42mm
Fire Glass	200mm*600mm*22mm or customized
Lock	Mortise lock
Hinges	5'' galvanized hinges
Panel	0.8mm galvanized steel sheet
Door Infilling	Perlite board
Fire Rating	30Min/ 60Min
Color	Color Sample
Modeling& Processing	Flat surface with a vision glass



Specification of steel fire rated doors



Type



PR-SFR01



PR-SFR02



PR-SFR03



PR-SFR06



PR-SFR07



PR-SFR04



PR-SFR05



PR-SFR08



PR-SFR09



PR-SFR10



PR-SFR11



PR-SFR14



PR-SFR12



PR-SFR13



PR-SFR15



PR-SFR16




PR-SFR17



PR-SFR18



PR-SFR19

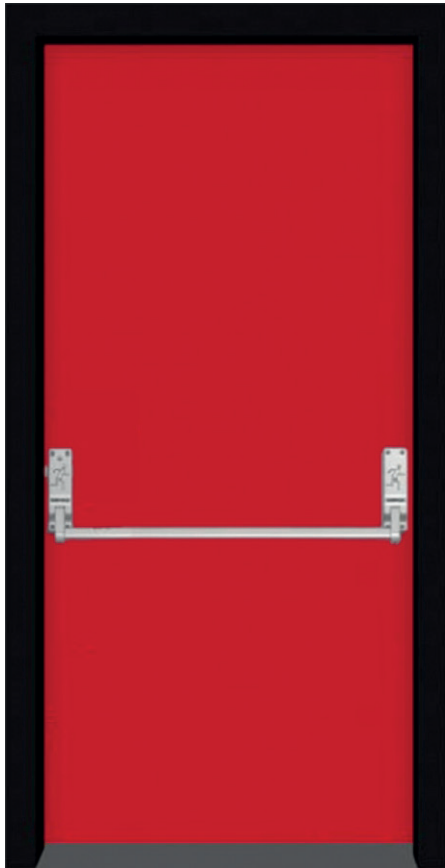

PR-SFR20



PR-SFR21



PR-SFR22



PR-SFR23



PR-SFR24



PR-SFR25



PR-SFR26



PR-SFR27



PR-SFR28



PR-SFR29



PR-SFR30



PR-SFR31



PR-SFR32



PR-SFR33



PR-SFR34



PR-SFR35



PR-SFR36



PR-SFR43



PR-SFR44



PR-SFR45



PR-SFR37



PR-SFR38



PR-SFR39



PR-SFR46



PR-SFR47



PR-SFR48



PR-SFR40



PR-SFR41



PR-SFR42



PR-SFR49




PR-SFR50




PR-SFR51

Measuring method for door size



Measuring Door Opening
(for door sets with frames)

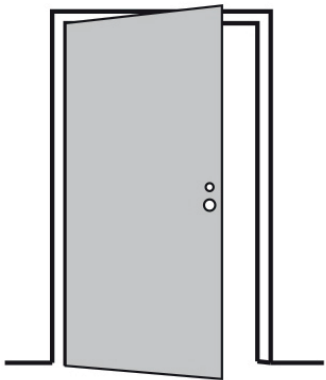



Right Hand

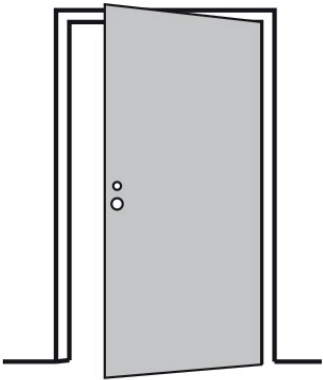


Left Hand

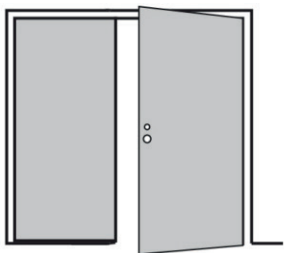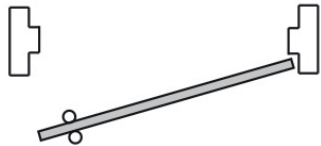



Left Hand Active
(Astragal with Flush Bolt Unit)

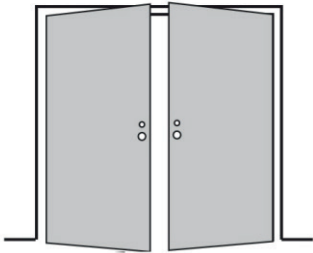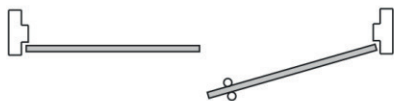

Both Hands Active (ball catch unit)

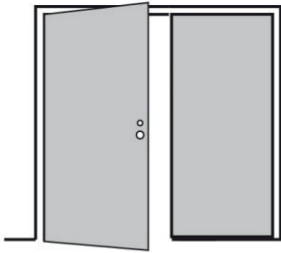

Right Hand Active
(Astragal with Flush Bolt Unit)

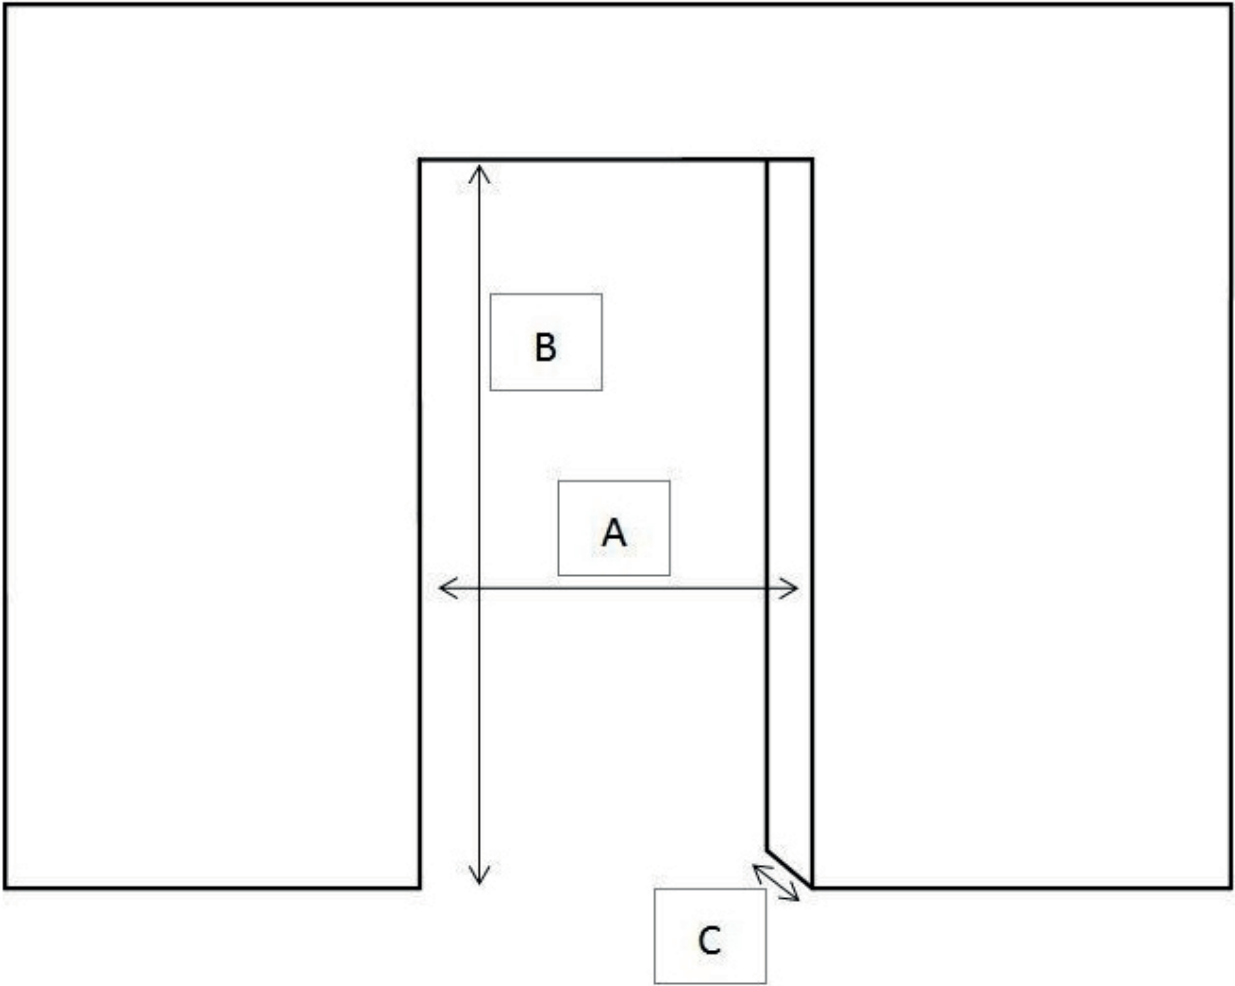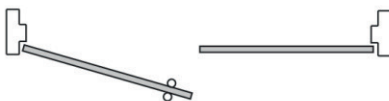

A:Opening Width
B:Opening Height
C:Wall Thickness

